model : smartiqo doorbell
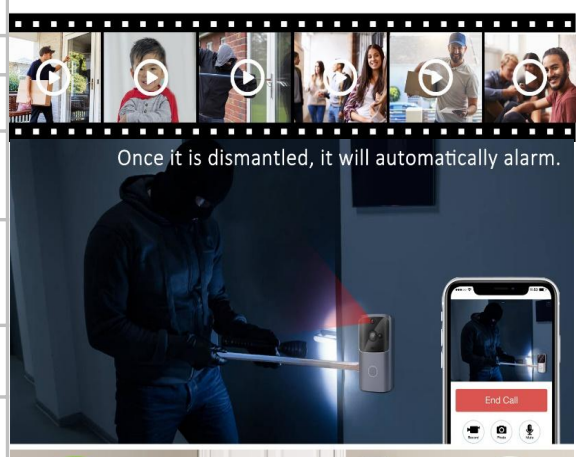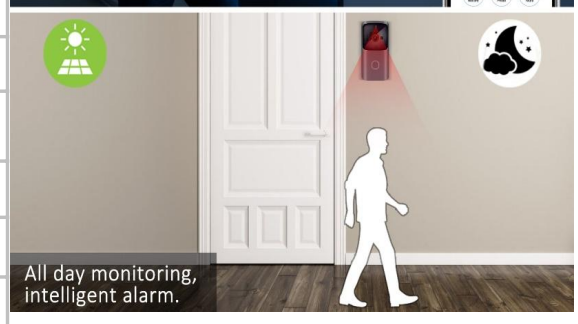
outdoor unit		
price	name	Wireless video to the doorbell
		Model Options with only doorbell or with chime or with batteries
describe	features	wireless connection, Ultra-low power consumption, Remote active awakening, Quick start
	use	Guests will be able to make video voice calls and take short videos. The owner will not need to open the door to know the information
	Wake up the way	The doorbell button awakens,PIR body detection wake up,Mobile phone call
	Alarm push	Push for 1 second
operating system	Number of users online	Multiple users are online simultaneously
	Dynamic DNS	Bring your own dynamic domain name
	processor	A powerful, high-performance, programmable media HiSilicon processor with built-in ARM926 @max. 440MHz and high-speed video coprocessor
collect	CCD	1/4 inch 720p scan CMOS sensor
	Sensor performance	Support automatic white balance, automatic gain control, automatic backlighting compensation
	SNR	≥39dB
	Lens/visual Angle	2.6mm @F2.0/140°
	LED	Double filter automatic switching, six 850 - nm Φ 28 mil high power infrared lamp, night vision 10 meters
	IR control	IR opens night vision, Automatic detection of infrared and ICR; IR shuts the night vision function off the infrared and the ICR is fixed in daily viewing mode
video	Compression standard	H.264 Main Profile/H.264 Baseline Profile/MJPEG/JPEG Baseline
	Video coding	More stream: 720P/24fps+VGA/30fps+QVGA/30fps+720P @1fsJPEG snap
	resolution	1280*720
audio	input	1 channel built-in - 38dB microphone
	output	Built-in speaker (8 Ω 1 w)
	interphone	Two - way voice - speak, bring back the echo cancellation
	Compression standard/ code rate	ADPCM/32kbps
network	Network protocol	TCP/IP,HTTP,TCP,UDP,SMTP,FTP,DHCP,DNS,DDNS,NTP,UPnP,RTSP, P2P
	wireless network	802.11b/g/n
	Wireless network security	WPS Security encryption
	wireless connection	One-button WIFI configuration
video	Video mode	Mobile detection video, doorbell button trigger video, manual video
	storage	The TF card stores the maximum support for 32gb
other	power	Battery power supply three section 18650 core international general
	Power consumption	Standby current 120 uA working current 170MA
	work environment	Working temperature: - 10 ~ 50 ℃, humidity is < 95%
	installation	Door wall mounting
	material	ABS
	Product size	13.3*7.4*3.5cm
	product weight	190g / No battery
	Packing size	/