

Smart Lock Manual

SmartiQo[®]

Basic System Operation/System Initialization


1. Basic Operation

- 1.1 Factory Default: Light up the keyboard, press [*][#] to enter admin mode, input the default password [1 2 3 4 5 6], press [#] to confirm, and enter the main menu.
- 1.2 Main Menu: Follow the voice prompts, press the corresponding number for functions, press [#] to confirm, and press [*] to cancel and exit.
- 1.3 [#]: Confirm/wake up screen; doorbell when no digits.
[*]: Clear digit/back function.

2. Menu navigation

Quick Initialization: Open the back panel battery cover, press and hold the reset button (RESET) for 5 seconds, release it, and press [#] when prompted. Voice prompt: Initialization successful.

3. Menu Navigation

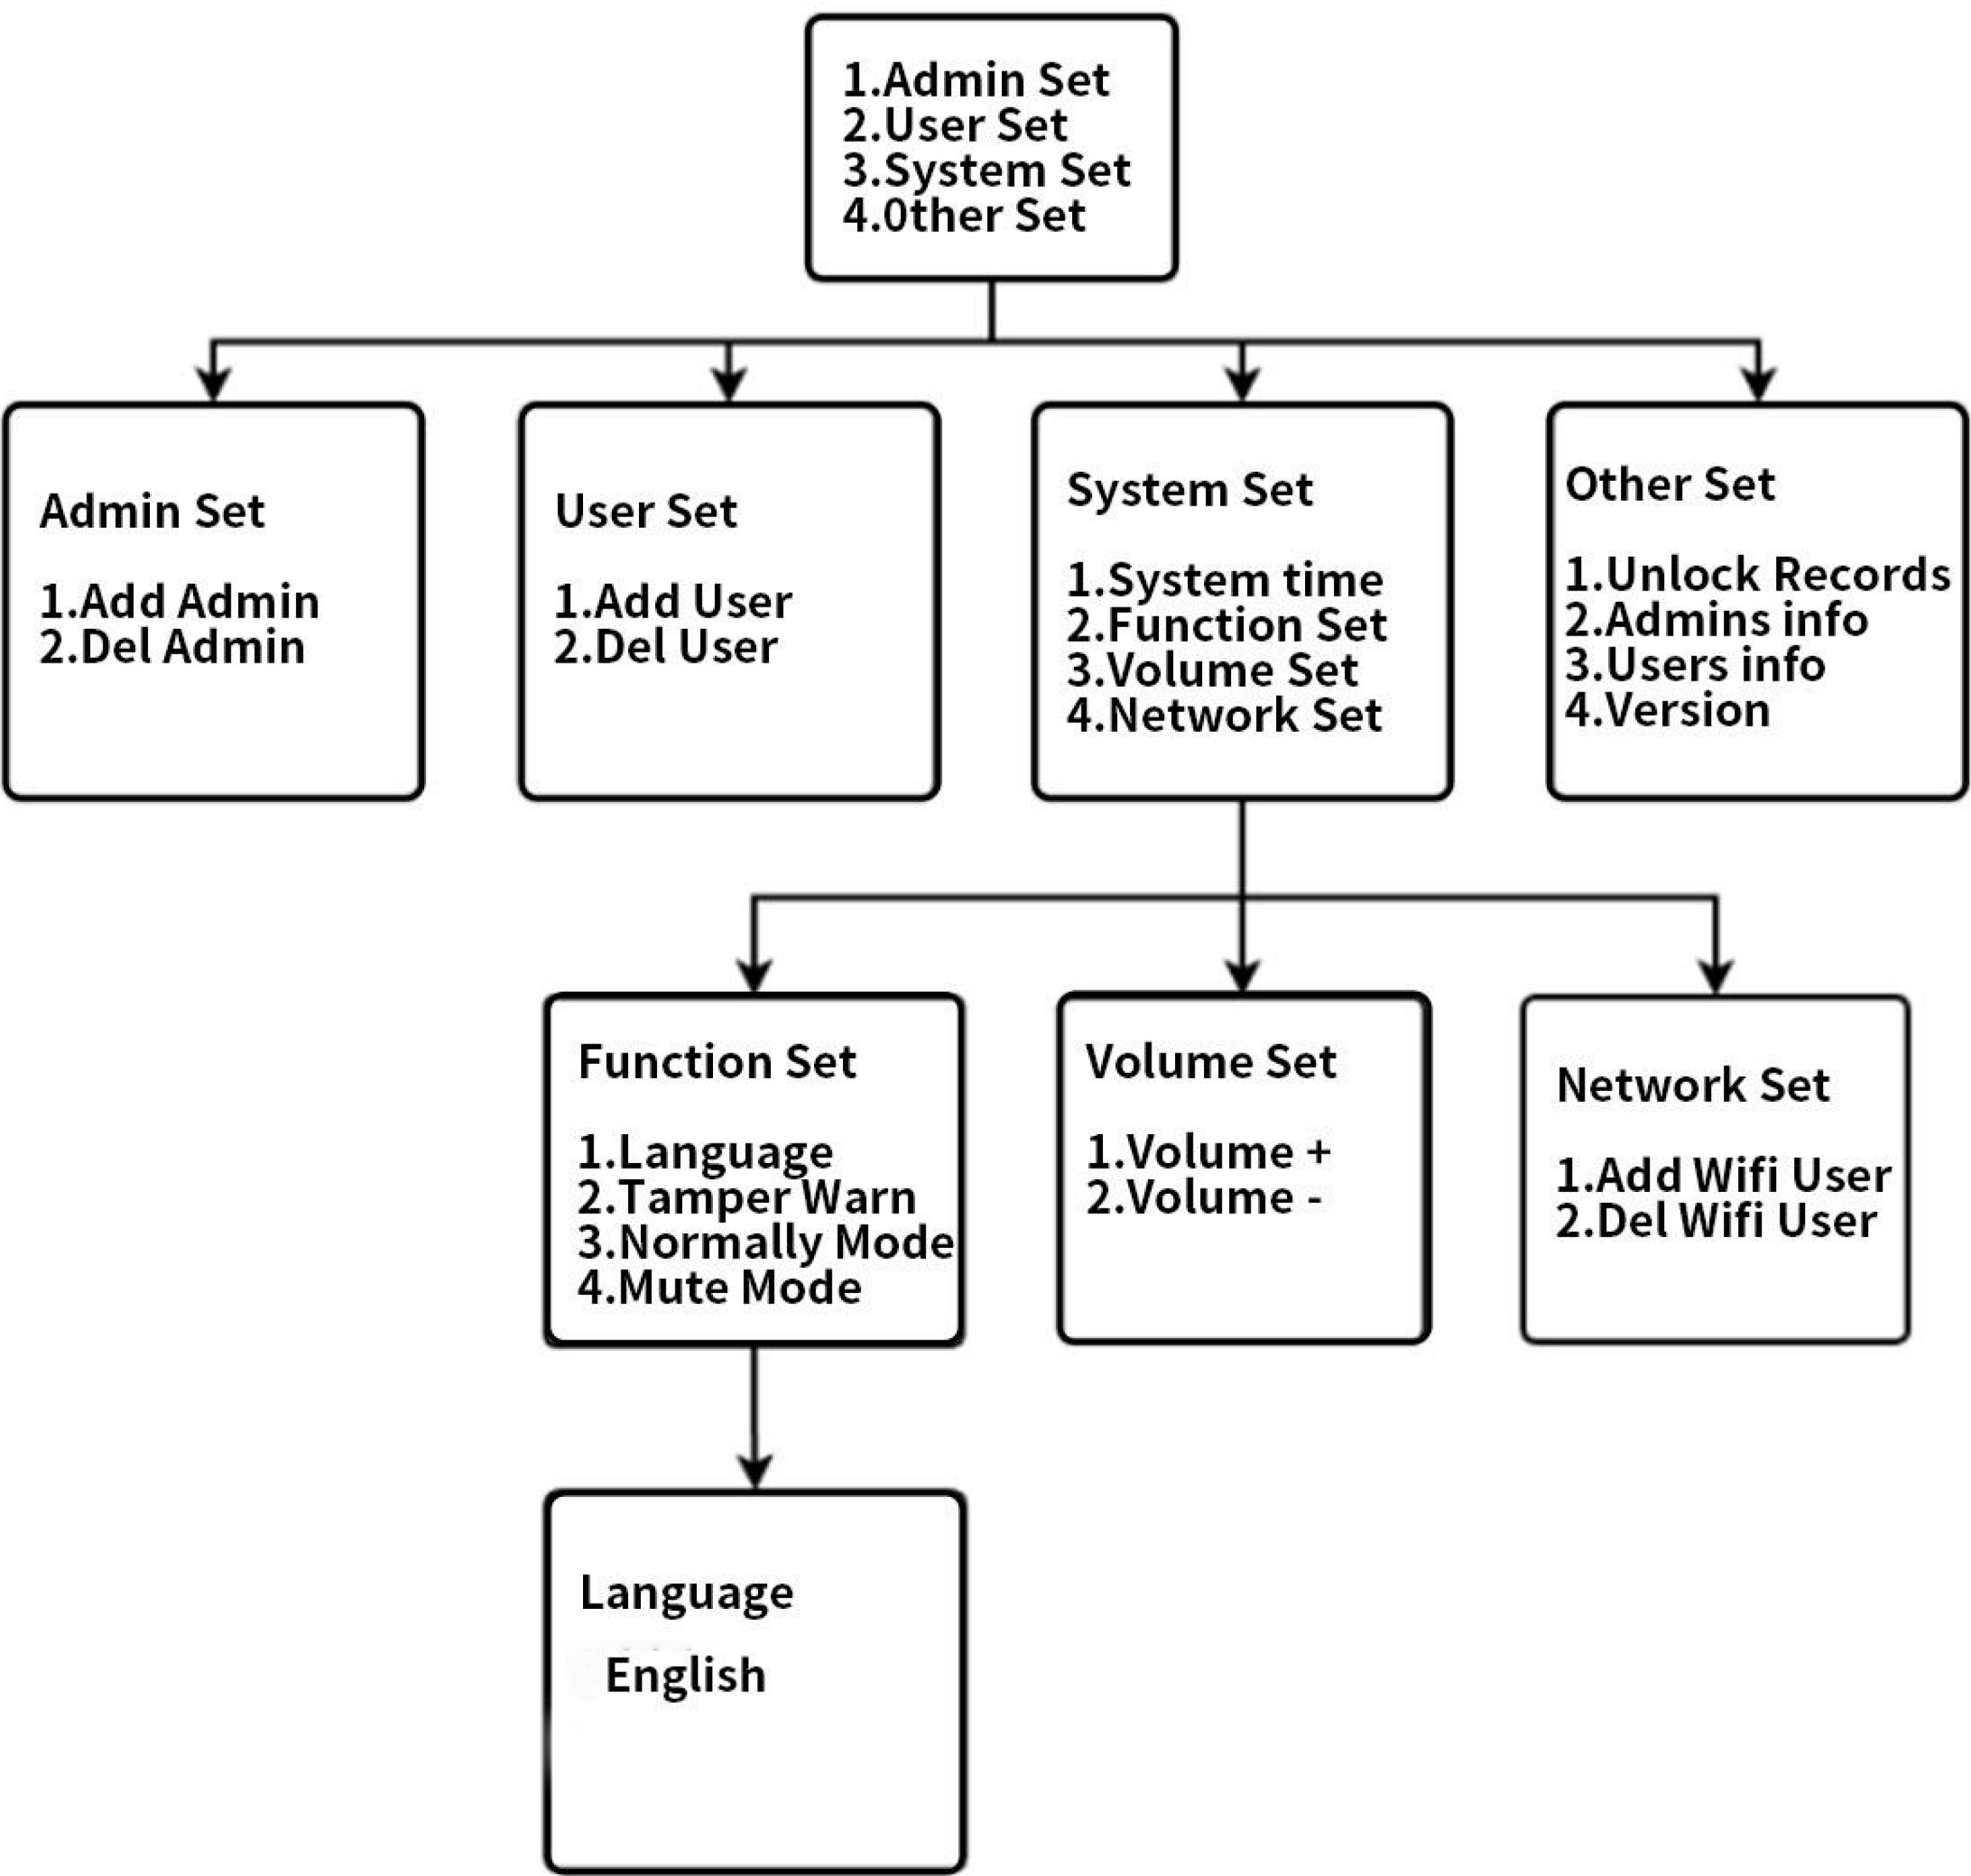

Admin Set

1. Add Admin: Enter system, press [1], then [1] again to add via password, card, or fingerprint.
2. Delete Admin: Enter system, press [1], then [2], input user number, press [#] to delete.




Regular User Settings:

1. Add User: Enter the system, press[2], then press [1] to add a user by password, card, or fingerprint.
2. Delete User: Enter the system, press [2], then press [2], input the user number, and press[#] to delete.




System Set


- 1.System Time
Enter system menu, press [3] for System Settings, press [1] to set time.

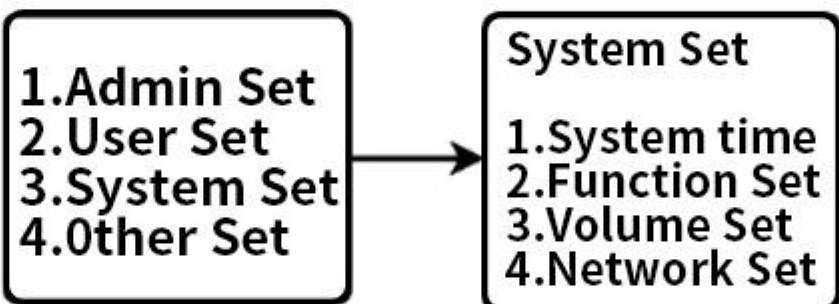


- 2.Set Functions:
Enter system menu, press [3] for System Settings, press [2] to set functions.

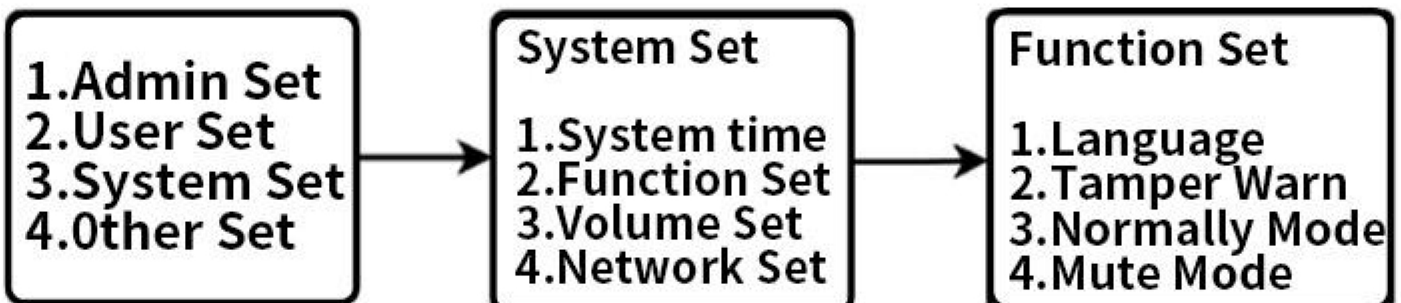

- 3.Set Volume:
Press [3] for System Settings, then press [3], press [1] to increase / press [2] to decrease volume.

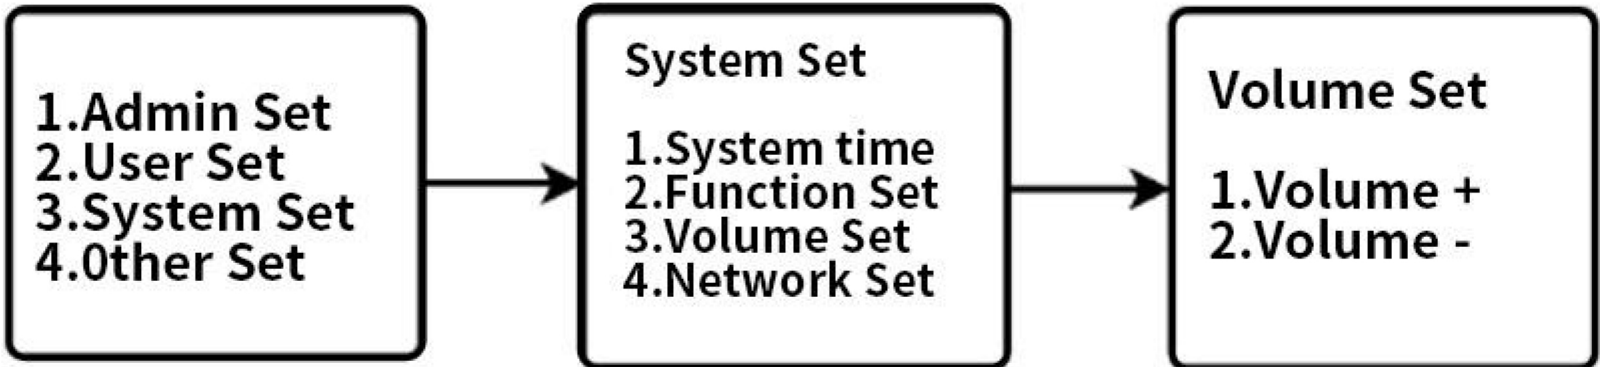


- 4.Set Network:
Press [3] for System Settings, then press [4], press [1] to add network / press [2] to delete remote user.

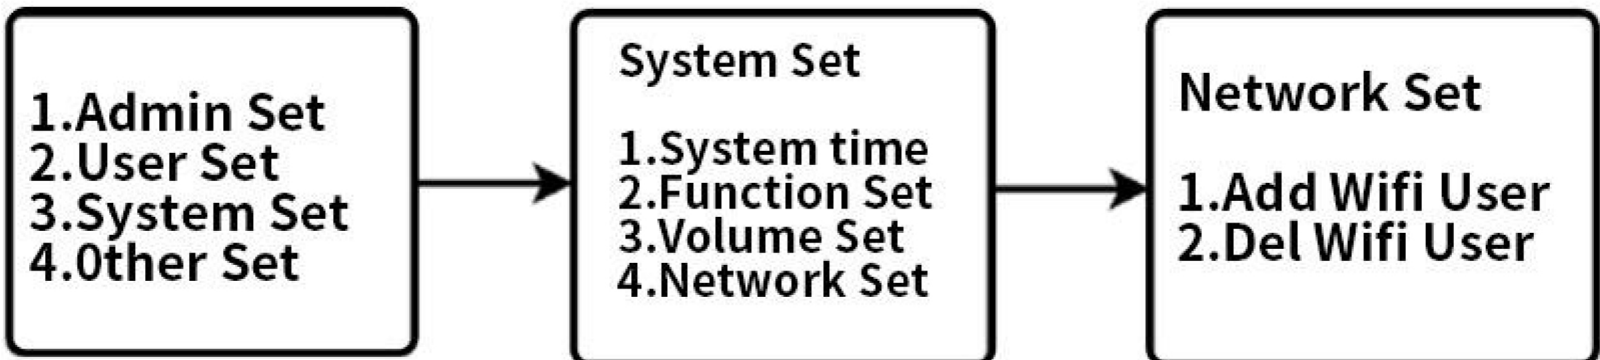

Other Set

Other Set: Enter the system menu, press [4] to enter Other Set.

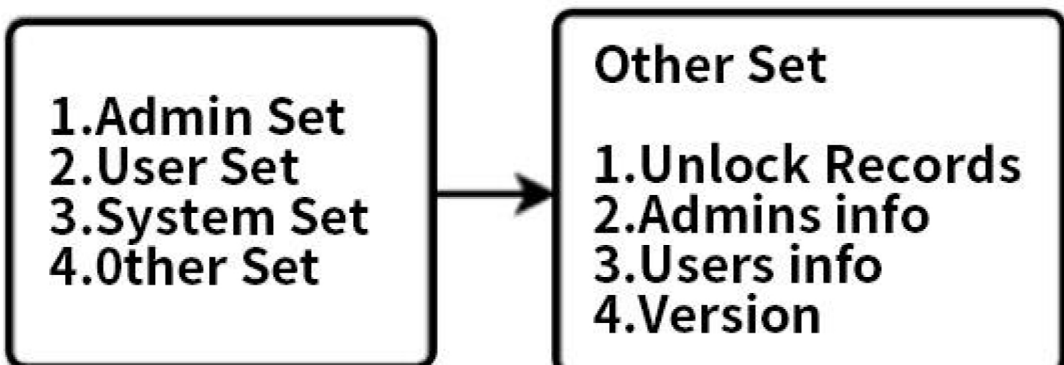

APP SETTING

Search Tuya Smart in app store or scan the QR code, register an account and login.




Android




ios

Before attempting to connect to the app, set the lock to wait for connecting:

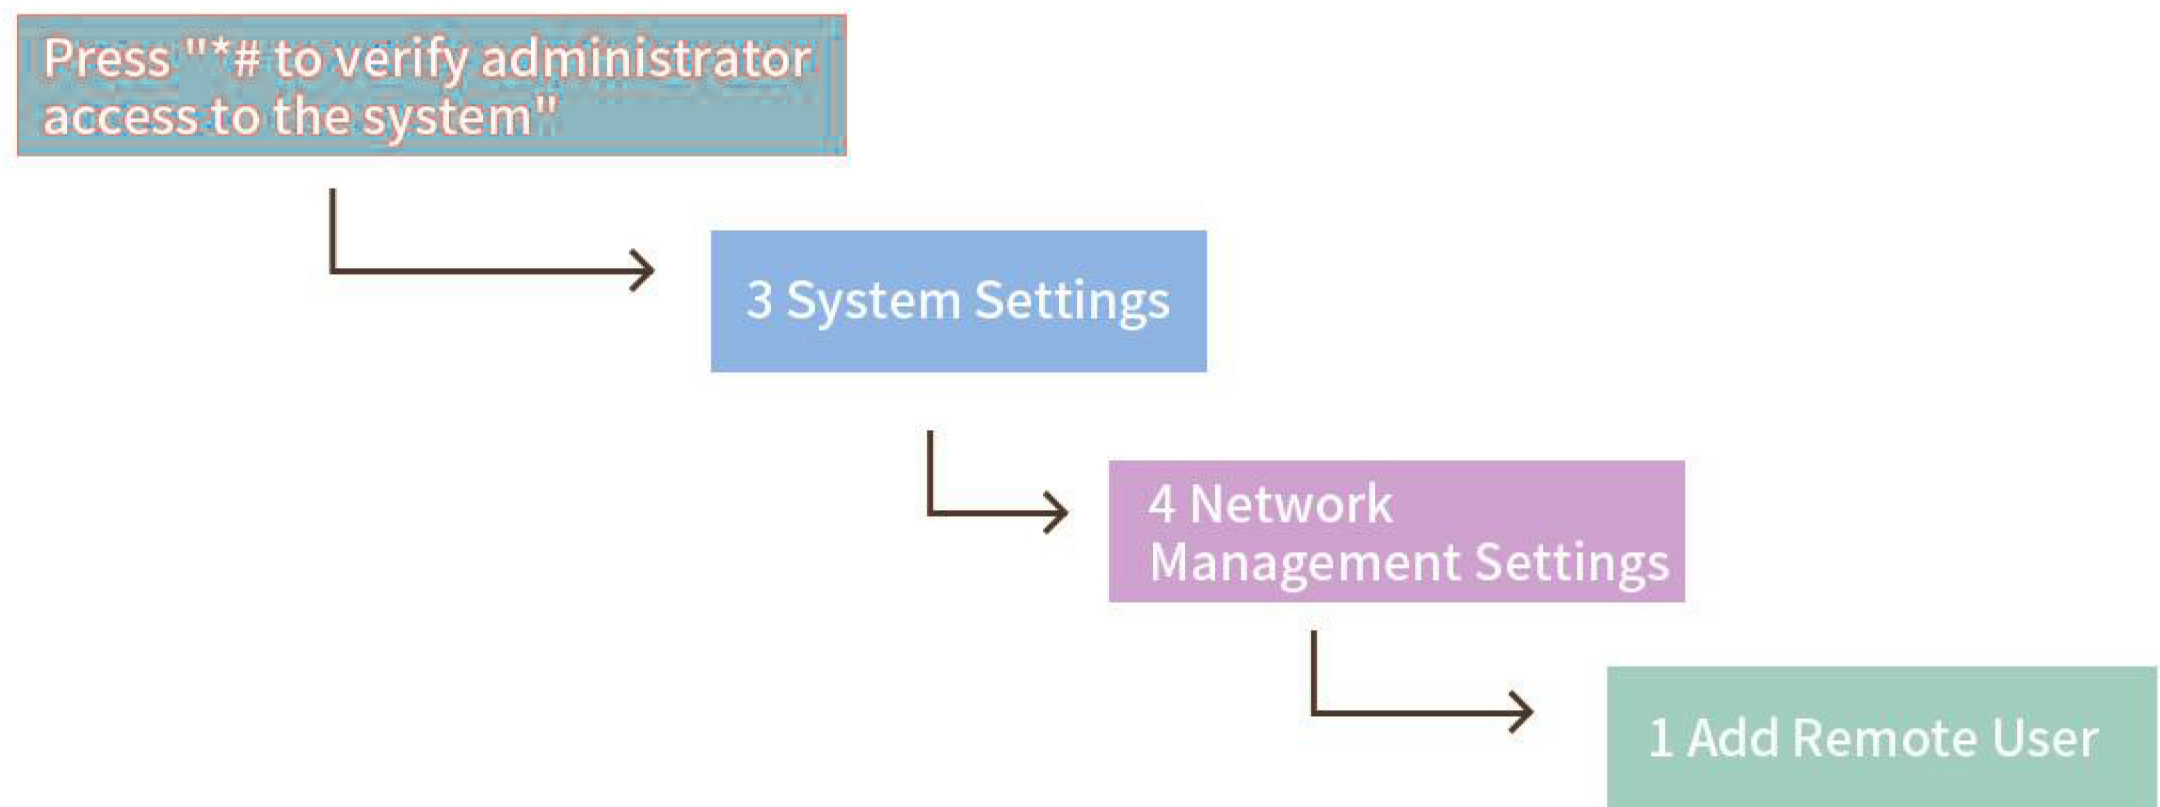


Then please follow setting steps below:


Step 1: Add Device

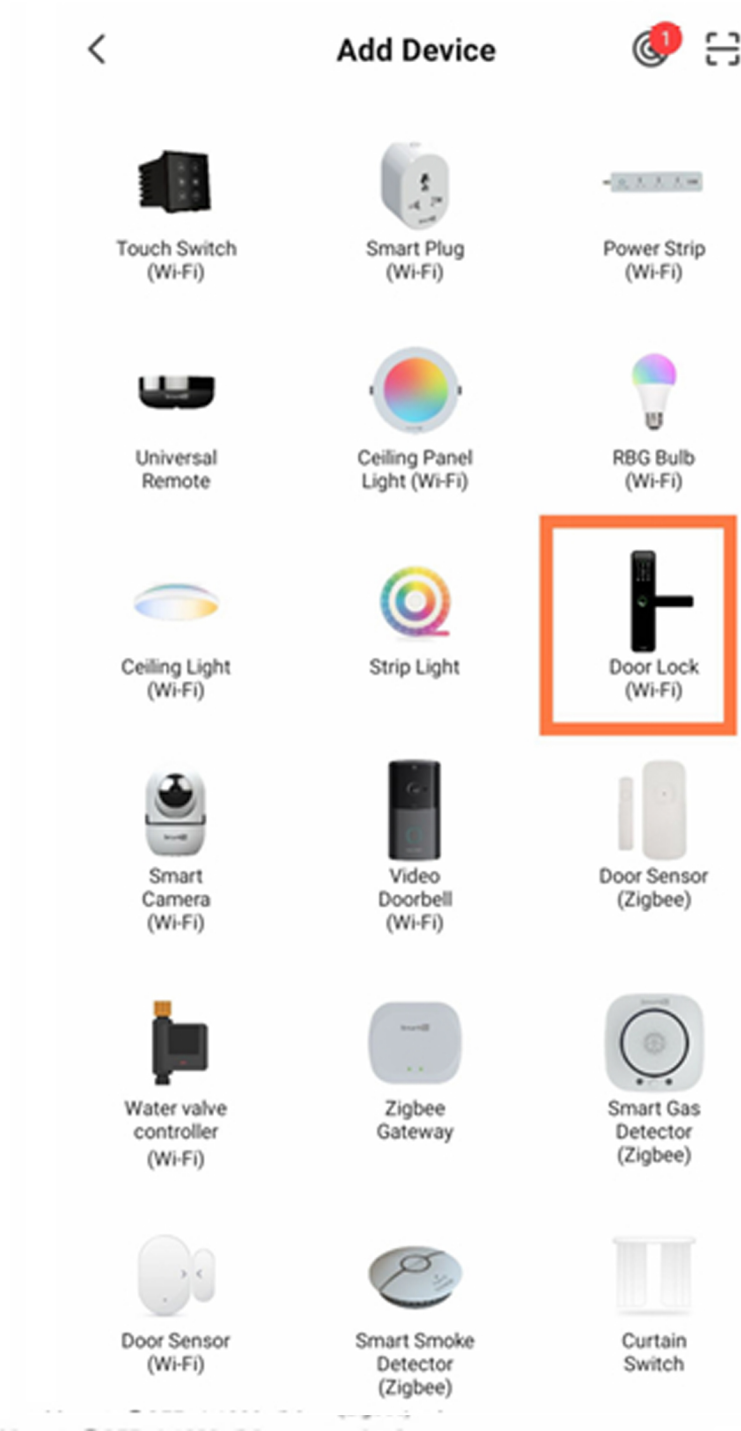


Step-2 : Enter the password of WIFI and click next

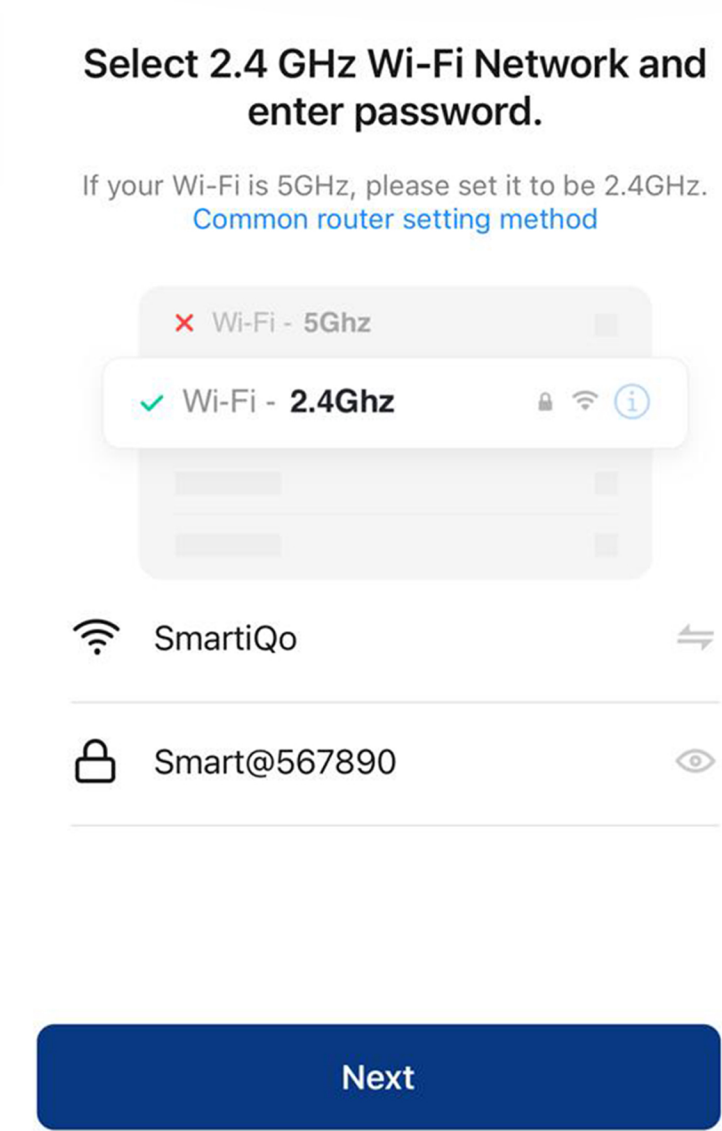


Step-3 : Confirm the number 5 blinking rapidly, and click next

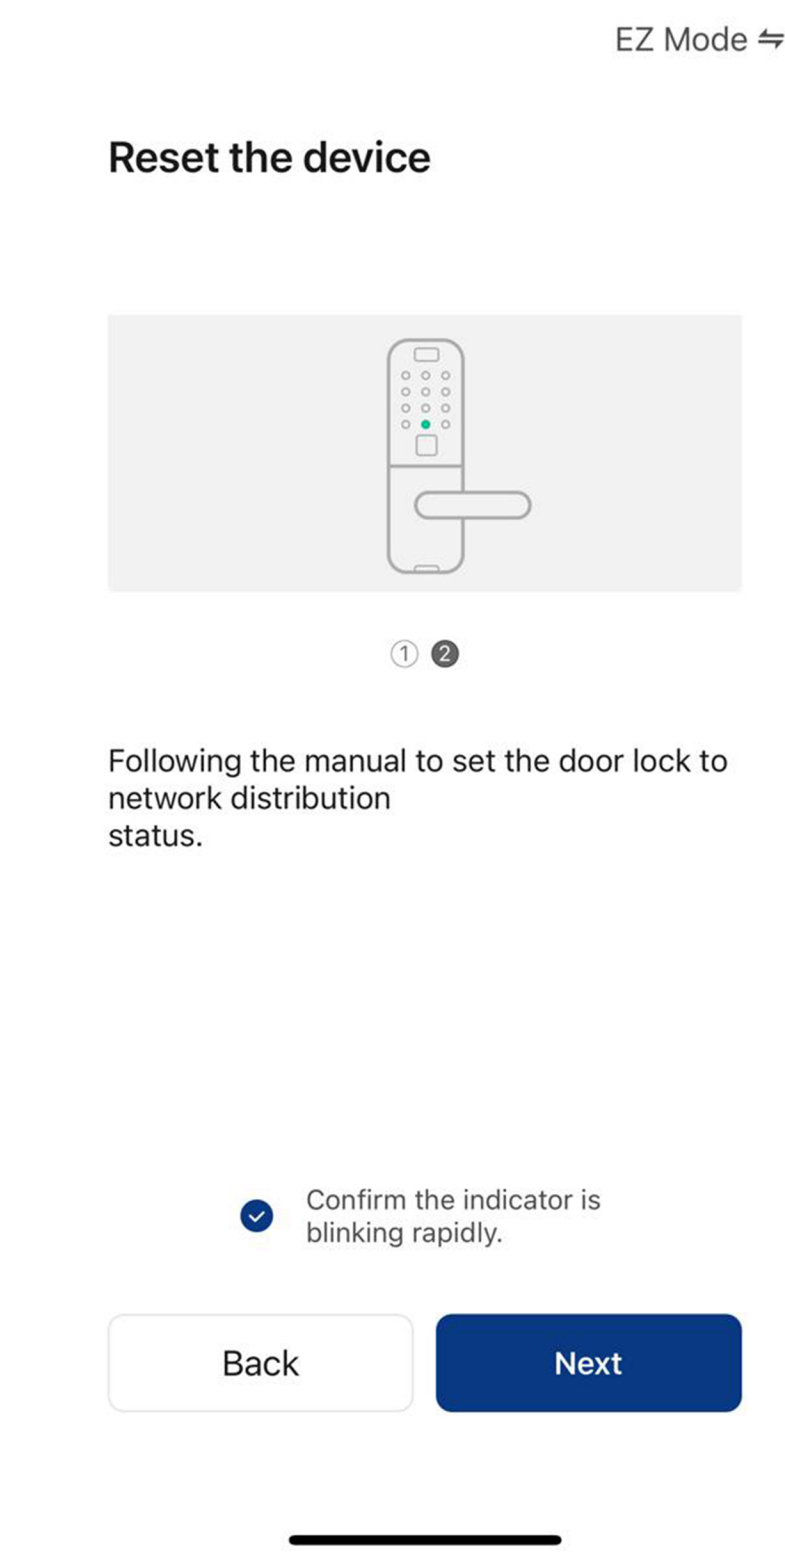

Step-4 : Scan the device

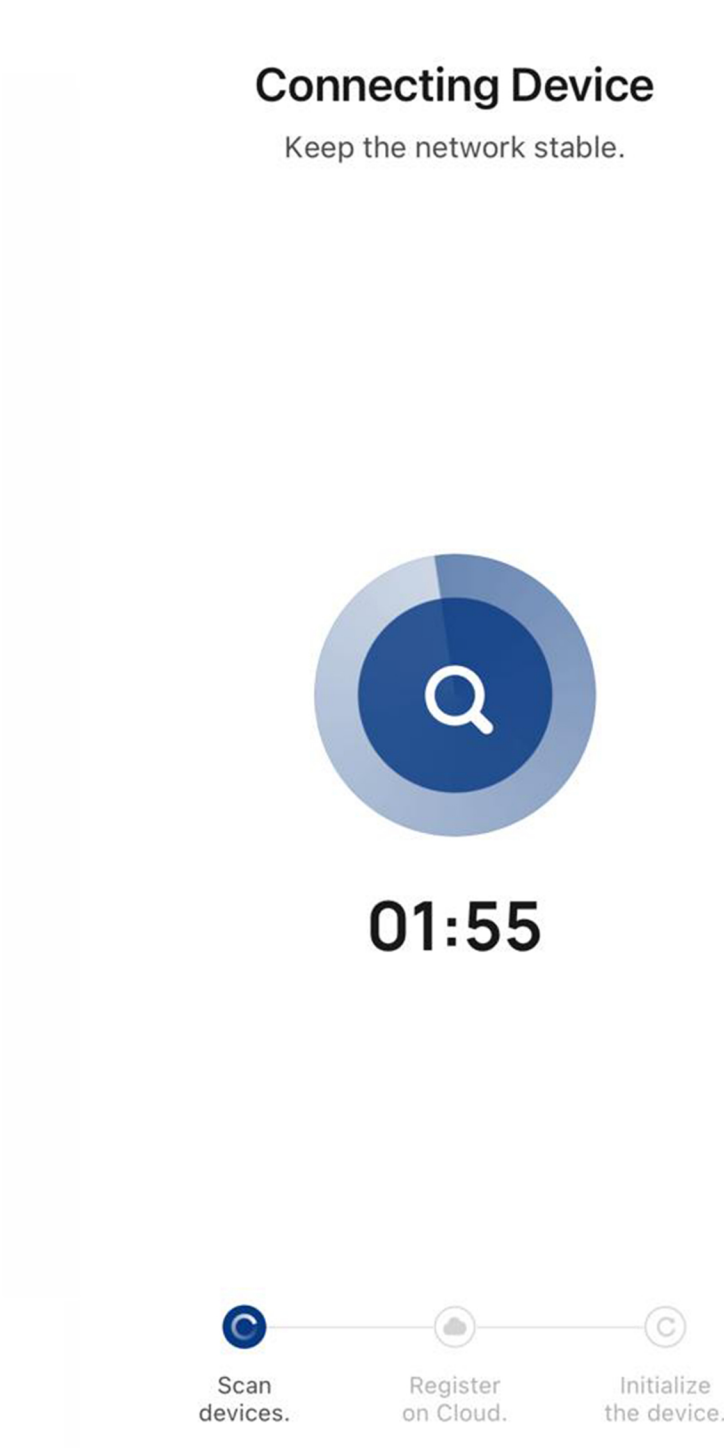

Step-5 : Add Device Successfully

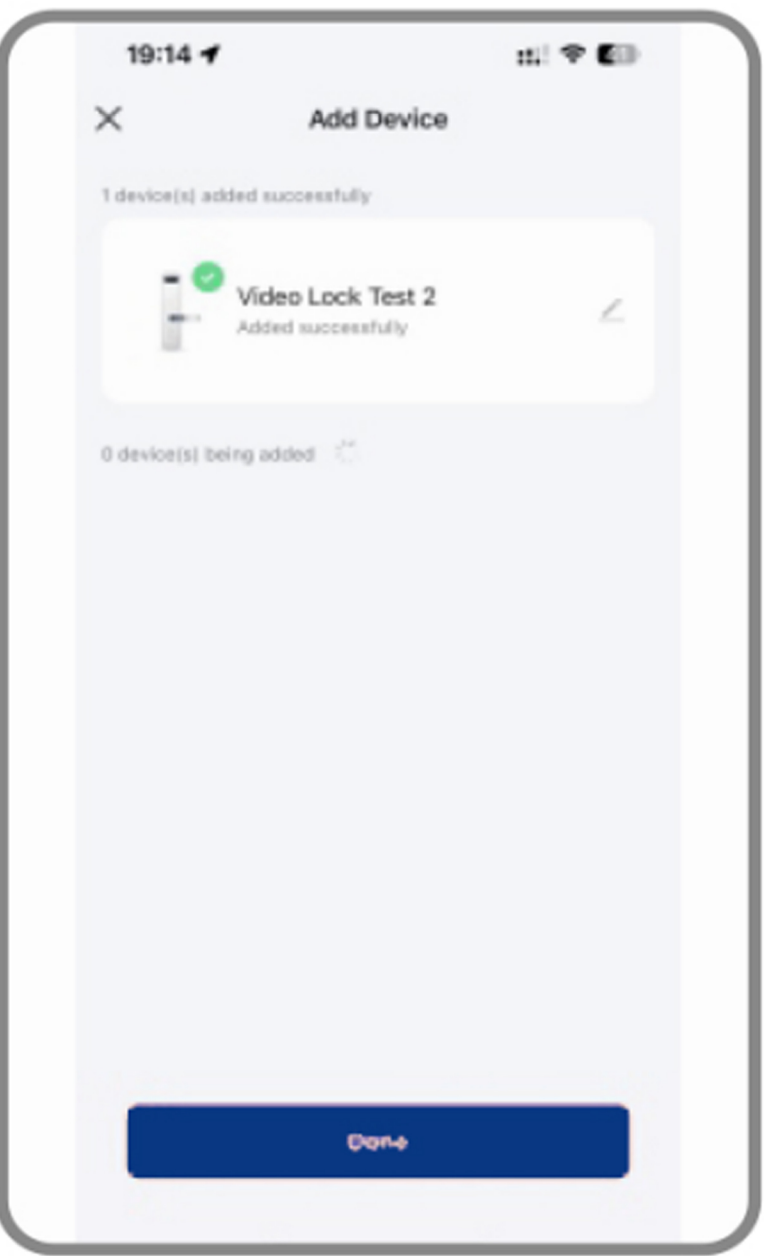

Step-6 : Interface, can edit lock name

